


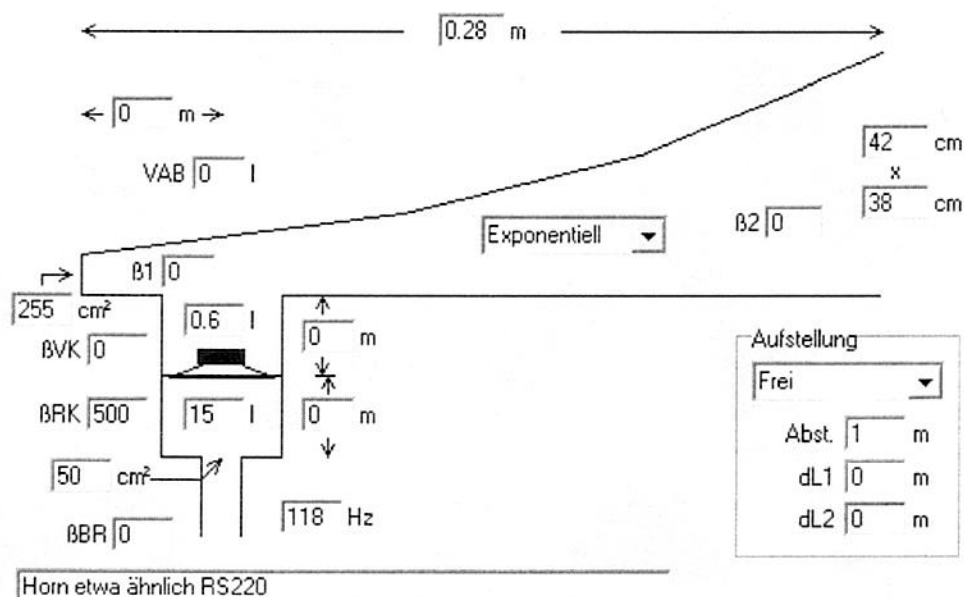

Treiber1:
 $R_{dc} = 5.1 \text{ Ohm}$
 $f_s = 70 \text{ Hz}$
 $Q_{es} = 0.21$
 $Q_{ms} = 3.7$
 $V_{as} = 16 \text{ l}$
 $P_{max} = 800 \text{ W}$
 $S_d = 220 \text{ cm}^2$
 $Z_{1k} = 9 \text{ Ohm}$
 $Z_{10k} = 27 \text{ Ohm}$
 $X_{max} = \pm 6 \text{ mm}$
 Anzahl Treiber1 = 2
 $U_e = 2 \text{ V}$
 Info = B&C 8 MDN 51

Frequenzweiche:
 $R_1 = 0.25 \text{ Ohm}$
 $L_1 = 0.8 \text{ mH}$
 $C_2 = 60 \text{ uF}$

Sonstiges:
 $C_{ms} = 0.233 \text{ mm/N}$
 $M_{ms} = 22.177 \text{ g}$
 $R_{ms} = 2.64 \text{ kg/s}$
 $B \times L = 15.39 \text{ N/A}$
 $P_e = 1.57 \text{ W}$
 $Q_{ts} = 0.199$

$V_{Horn} = 20.47 \text{ l}$
 $l_{br} = 3.8 \text{ cm}$
 $V_{gesamt} = 36.263 \text{ l}$

Treiber2:
 Ohne